

BPS-H

系列管道泵 PIPE PUMPS

These minitype pipe pumps add high quality insulation material and adopt heat-resisting mechanical seal components. Hence, the pumps can work normally under the high temperature. they can be well applied to the solar energy or cycle supply of hot water for industrial equipments .they are reliable, safe and simple to use

BPS-H系列管道泵增加优质的隔热材料及采用耐高温密封件，使泵在高温情况下也能正常工作，不管在太阳能或工业设备上的热水循环供水都能很好的运用，安全可靠，使用方便。

WORKING CONDITIONS

Max temperature of fluid up to 80°C

Max pressure 10bar


Max ambient temperature 40°C

工作条件：

最高流体温度 80°C

最大可承受压力10bar

最高环境温度40°C

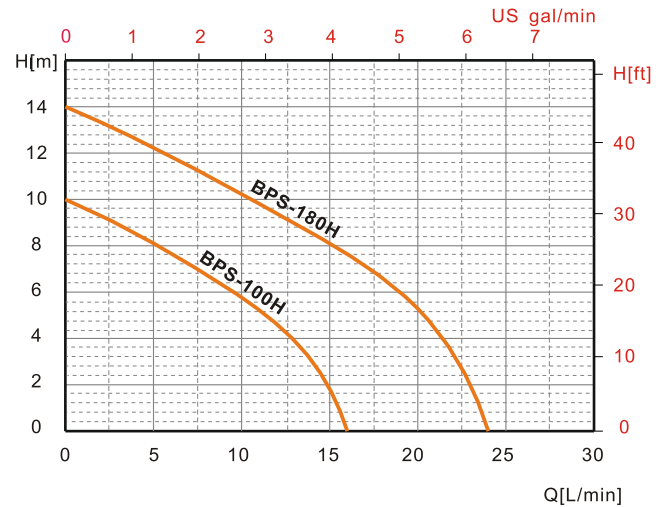

FOR HOT WATER



	BPS-100H	BPS-180H
功率 Power	0.13HP 0.1kW	0.24HP 0.18kW
流量 Q.Max	16 l/min	24 l/min
扬程 H.Max	10 m	14 m
口径 Pipe Dia	1/2"(15mm)	1/2"(15mm)
包装尺寸 LXWXH	161X98X100 mm	181X110X114 mm
净重 N.W	2.7 kg	3.8 kg